

TCP Congestion Control

Christian Grothoff

Berner Fachhochschule

December 20, 2017

TCP Congestion Control

- ▶ Flow control forces the sender to stop if the receiver is too slow
- ▶ Congestion control forces the sender to slow down if the network is too slow

Key issue:

How fast can we (re-)transmit frames?

The congestion window

- ▶ Limits the total number of *unacknowledged* packets that may be in transit
- ▶ Initial window is (traditionally) two maximum segment sizes (MSS)
- ▶ Modern initial congestion window is (up to) ten MSS
- ▶ Window size changes over time based on network conditions
- ▶ Window size also limited by receiver window (flow control)

Slow start

- ▶ Initial congestion control mode after setup or timeout
- ▶ Increases congestion window by 1 MSS for every packet acknowledged
- ▶ Mode ends if congestion window exceeds *ssthresh* limit

Slow start *doubles* the window size every RTT.

Slow start is *very aggressive* \Rightarrow Worst name ever!

Congestion avoidance

- ▶ Congestion control mode after *ssthresh* limit
- ▶ Increases congestion window by 1 MSS every RTT *unless* duplicate ACKs are received

Congestion avoidance grows much slower than “slow” start.

Dealing with trouble: TCP Tahoe

Upon three duplicate ACKs or timeout:

- ▶ Retransmit packet indicated by ACK (“fast retransmit”)
- ▶ *ssthresh* set to half of current congestion window
- ▶ Congestion window reset to 1 MSS
- ▶ Resume with slow start

Dealing with trouble: TCP Reno

Upon three duplicate ACKs:


- ▶ Retransmit packet indicated by ACK (“fast retransmit”)
- ▶ *ssthresh* set to half of current congestion window
- ▶ Congestion window reset to (new) *ssthresh*
- ▶ Continue with “fast recovery”

Timeout behavior same as TCP Tahoe.

Fast recovery

- ▶ Complete fast retransmit
- ▶ Wait for next acknowledgement
- ▶ Continue with congestion avoidance

Window size in pictures¹

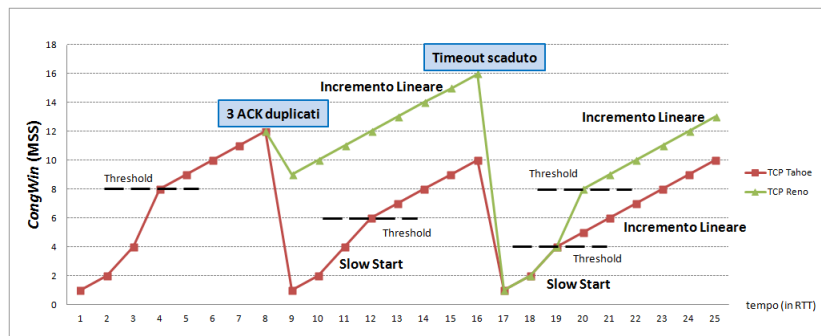

¹CC-BY-SA: https://commons.wikimedia.org/wiki/File:CongWin_in_TCP_Tahoe_e_Reno.png

Diversity

Every other network research group has published a congestion control algorithm:

- ▶ TCP New Reno
- ▶ TCP Hybla
- ▶ TCP BIC
- ▶ TCP CUBIC
- ▶ TCP Westwood
- ▶ ...

Fairness

- ▶ Basis is additive increase, multiplicative decrease (AIMD) feedback control algorithm as seen in TCP Tahoe
- ▶ Multiple flows using AIMD will converge to use *equal amounts* of contended link
- ▶ Algorithms that compete fairly are called **TCP friendly**